

# 8-ZONE IP MICROPHONE

## DESCRIPTION

- 8-zone microphone console to broadcast live or delayed messages: keypad with capacitive keys (each key corresponds to a zone and is equipped with a green LED to indicate the selection of the zone).
- 3 push-buttons to record (record with replay), to broadcast live or delayed.
- Built-in loud-speaker to listen to the message before broadcast.
- "Jingle" before broadcast of the message.
- Archiving of voice messages. A filed message can be used in a step of a program.
- Supervision: SNMP v1 and v2c.

## COMPLIANCE

- Directive LVD 2014/35/EU,
- Directive EMC 2014/30/EU.



## ELECTRICAL FEATURES


- Power supply..... PoE (Power over Ethernet).
- Consumption..... 8 W.
- Sensitivity..... -58dB  $\pm$ 2dB.
- Number of keys..... 8.

## MECHANICAL FEATURES

- Construction..... LCD screen with 2 lines of characters:
  - Character size: 5 mm.
  - White characters on blue background.
  - Maximum number of characters per lines: 12.
- Operating temperature range..... 0° to +50°C.
- Protection index..... IP31, IK06.
- Weight..... 450 g.
- Dimensions of the base..... L198 x H34/23 x D167 mm.
- Gooseneck length (including the microphone) 330 mm.

## REFERENCE

- 907 755..... Harmonys 8-zone microphone

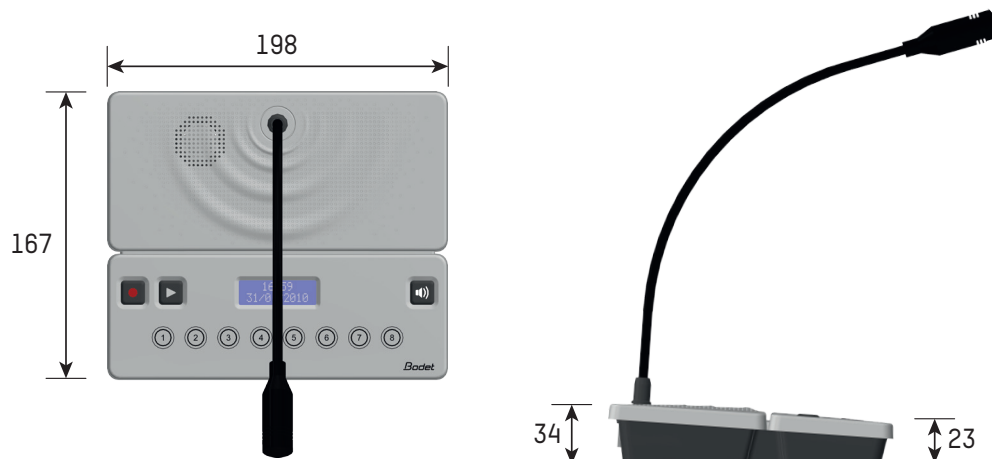

Dimensions in mm

