

## DESCRIPTION

The Indoor White LED Melodys Flash emits luminous signals (flashes) the same way melodies are broadcasted by the Melodys Sounder (programming is identical to that of the Melodys sounders).

- Controlled by the Sigma master clock (Sigma P or Sigma Mod) in DHF mode.
- 1 « Test » push-button.
- 2 LED which give indications about the operation:
  - LED « ~ » (green) indicates that the unit is powered up.
  - LED « Ψ » (green/orange/red) informs about the configuration of the system.
- 4 levels flash luminosity adjustment.
- 2 flashing modes: « Normal » mode or « SEP » mode.



## STANDARDS

- Applicable standards: EN 55022 - EN 55024 - EN 60950 - EN 301-489-3 - EN 300-220-2.

## RECOMMENDATIONS

- We recommend that the White LED Melodys Flash be installed:
  - in direct view of the people present in covered area,
  - in each room where people will be present,
  - in a location the least exposed to luminous sources for better contrast.

## MECHANICAL FEATURES



- **Construction**..... Translucent polycarbonate cover.
- **Mounting**..... Wall or ceiling mounting.
- **Protection index**..... IP 30, IK 02.
- **Dimensions**..... H157 x W93 x D53 mm.
- **Weight**..... 430 g.
- **Dimensions entered by cables**..... Opening for cables 2 x 2.5<sup>2</sup> for girdle of maxi 10 mm.
- **Operating temperature range**..... 0 to +50°C.

## ELECTRICAL FEATURES

- **Power supply**..... 100-240VAC - 50/60Hz.
- **Consumption**..... 100-240VAC ; 120-50mA.
- **Luminosity**..... 60 candela/m<sup>2</sup>.
- **Electrical insulation**..... Class II.
- **Power supply connections**..... 2 terminals - N (neutral) and L (phase) for 2.5mm<sup>2</sup> max. wires.

## REFERENCE

- **907 595**..... Indoor DHF Melodys Flash – 100-240VAC

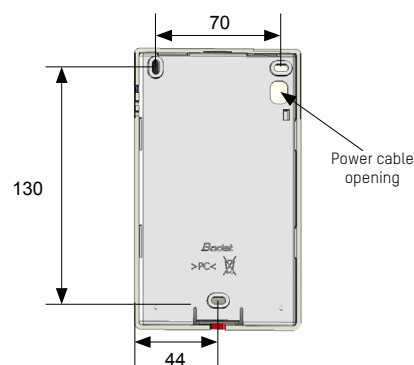

Dimensions in mm

Réf.: 643391E 01/18