

DHF OUTDOOR MELODYS LED FLASH

DESCRIPTION

The Outdoor Melodys LED Flash emits a luminous signal the same way melodies are broadcasted by the Melodys Sounder (programming is identical to that of the Melodys sounder).

- Controlled by the Sigma master clock (Sigma P or Sigma Mod) in DHF mode.
- 1 « Test » push-button (accessible by opening the controller box).
- 2 LED give indications about the operation (LEDs visible by opening the controller box):
 - LED « ~ » (green) indicates that the unit is powered up.
 - LED « Ψ » (green/orange/red) informs about the configuration of the system.
- Duration of the control signal: 30 seconds.



STANDARDS

- Applicable standards: EN 55022 - EN 55024 - EN 60950 - EN 301-489-3 - EN 300-220-2.

RECOMMENDATIONS

- We recommend that Outdoor Melodys LED Flash be installed in direct view of all the people present in the covered area.

MECHANICAL FEATURES

- **Construction**..... Controller box: polycarbonate reinforced with glass fibre.
LED strobe light beacon: Orange shockproof polycarbonate and black polyamide base
- **Mounting**..... Wall mounting bracket.
- **Protection Index**..... Power supply/controller casing: IP54, IK07.
LED strobe light beacon: IP55, IK07
- **Dimensions**..... Controller box: L250 x W195 x D97,5 mm.
The information sign: 200 x 200, 4 mm thick.
The beacon: Diameter: 126 mm.
- **Weight**..... Controller box: 1200 g.
LED Strobe light beacon: 600g.
- **Dimensions entered by cables**..... PG11 cable gland for power cable.
PG7 cable gland for beacon cable.
- **Operating temperature range**..... -30 to +50°C.


ELECTRICAL FEATURES

- **Power supply**..... 100-240VAC - 50/60Hz.
- **Consumption**..... 100-240VAC ; 1.2-0.5A.
- **Luminous power**..... Equivalent to a H1 70W light bulb
- **Electrical insulation**..... Class I.
- **Power supply connections**..... 3 terminals - N (neutral) and L (phase) and T (ground) for 2.5mm² max. wires.
- **Distance between the controller and the beacon**..... 5 meters (the cable is supplied).



REFERENCE

- **907 594*** Outdoor Melodys LED Flash – 100-240VAC

*The wall mounting bracket is included

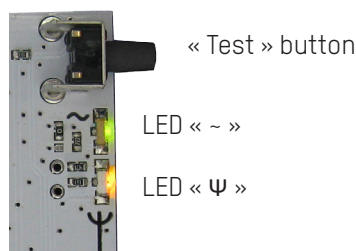

Information sign

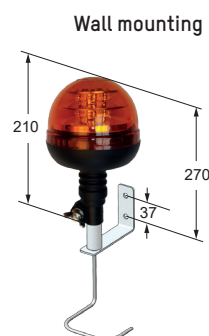

Dimensions in mm

