


DESCRIPTION







- Analogue display clock for indoor.
- Hour-Minute or Hour-Minute-Second display depending on the model.
- Background: PC/ABS.
- Crystal: heat-tempered glass.
- Casing (front): brushed stainless steel.
- Protection index: IP40, IK06.
- Optimal viewing distance: 20m.
- Dial markings: Arabic figures or minute notches or DIN.
- Optional: wall mount locking disc, wall mount thin bracket and double-sided bracket for ceiling or wall hanging.



STANDARDS

- Directive EMC 2014/30/EU: EN55022, EN55024.
- Directive LVD 2014/35/EU: EN60950.
- Directive RED 2014/53/EU: EN301-489-3.

TECHNICAL FEATURES

	Movement	Power supply	Operating temperatures	Weight
	24V minute parallel impulse	-	- 10°C to +50°C	1.2 kg
	24V second parallel impulse	-	- 10°C to +50°C	1 kg
	AFNOR AFNOR (silent, sweeping second)	6 to 24 VDC	- 5°C to +50°C	1 kg
	NTP NTP (silent, sweeping second)	Power over Ethernet, Class 0 device, 2W maximum	- 5°C to +50°C	1 kg
	DHF battery	2x1.5V LR6 batteries	- 5°C to +50°C	1 kg
	DHF TBT	6 to 16 VDC	- 5°C to +50°C	1 kg

REFERENCES

Hour-Minute	Hour-Minute-Second	
981 5x7	-	24V minute impulse
-	981 4x7	24V second impulse
982 8x7	982 9x7	AFNOR
-	982 Ax7	AFNOR (silent)
982 Fx7	982 Gx7	NTP
-	982 Hx7	NTP (silent)
982 2x7	982 3x7	DHF battery
982 4x7	982 5x7	DHF TBT

Substitute the « x » by the figure corresponding to the desired dial.

Dials models (x):

1 = Arabic figures 

2 = Minute notch 

3 = DIN 

MOVEMENTS AND SYNCHRONISATION

• 24V minute impulse

Slave clocks are connected to a distribution line and activated through electrical impulses sent every minute by the master clock.

• 24V second impulse

Slave clocks are connected to a distribution line and activated through electrical impulses sent every second by the master clock.

• AFNOR

The coded time distribution consists in transmitting a complete time message every second: the time on the receiver is automatically and immediately set after connection to the clock line.

The AFNOR coded time does not interfere with any other transmissions, and is insensitive to other electrical interference.

Consumption TBT: 10 mA (6 VDC), 8 mA (24 VDC).

• AFNOR Silent (sweeping second)

The coded time distribution consists in transmitting a complete time message every second: the time on the receiver is automatically and immediately set after connection to the clock line.

The AFNOR coded time does not interfere with any other transmissions, and is insensitive to other electrical interference.

The second hand's movement is continuous. The advantage of this clock is its very low noise level (<20dB at 1 metre).

Consumption TBT: 10 mA (6 VDC), 8 mA (24 VDC).

• Network Time Protocol (NTP)

Slave clocks are connected to the Ethernet network and powered by PoE (Power over Ethernet).

The time is synchronised by the time server or the master clock over the Ethernet network in unicast, multicast or DHCP mode.

• Network Time Protocol (NTP) silent

Slave clocks are connected to the Ethernet network and powered by PoE (Power over Ethernet).


The time is synchronised by the time server or the master clock over the Ethernet network in unicast, multicast or DHCP mode.

The second hand's movement is continuous. The advantage of this clock is its very low noise level (<20dB at 1 metre).

• DHF



The DHF clocks pick up the time signal sent by the master clock via a radio signal and synchronise automatically. If radio reception is poor, the clocks keep time thanks to their own time systems.

Consumption TBT: from 15mA at 6V to 8mA at 12V to 7mA at 16V.

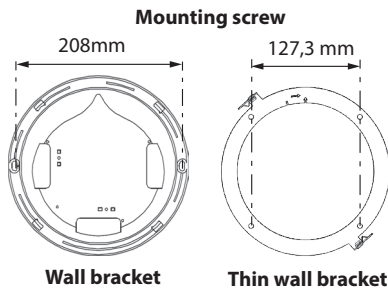

Wall bracket

Thin wall bracket




Dimensions in mm

Once the the bracket (wall or double-sided) is installed, turn the clock a quarter turn in the clockwise direction so that the clock is in the correct position.


MOUNTING ACCESSORIES

- 981 001..... Double-sided bracket
- 981 002..... Short double-sided bracket
- 981 003..... Thin wall bracket (Locking disk)
- 981 004..... Joining ring for double sided Profil 730 clocks
- 981 006..... Wall bracket (Locking disk)
- 938 914..... 230V recess mounting power supply for TBT clock
- 938 916..... 230V plug-in power supply for TBT clock

Double-sided bracket mounting



Double sided with joining ring



With thin bracket, clock flush with wall

12 mm between wall and clock with locking disk



Thin wall bracket

Wall bracket (locking disk)

